Discussion:

- The translation of an equation $\tilde{X} = t$ is very simple :-)
- Often the constructed cells immediately become garbage :-(

Idea 2:

- Push a reference to the run-time binding of the left-hand side onto the stack.
- Avoid to construct sub-terms of t whenever possible !
- Translate each node of t into an instruction which performs the unifcation with this node !!

Discussion:

- The translation of an equation $\tilde{X} = t$ is very simple :-)
- Often the constructed cells immediately become garbage :-(

Idea 2:

- Push a reference to the run-time binding of the left-hand side onto the stack.
- Avoid to construct sub-terms of t whenever possible !
- Translate each node of t into an instruction which performs the unifcation with this node !!

$$\begin{aligned} \text{code}_G\ (\tilde{X} = t)\ \rho \quad &= \quad \text{put}\ \tilde{X}\ \rho \\ &\qquad\quad \text{code}_U\ t\ \rho \end{aligned}$$

Let us first consider the unifcation code for atoms and variables only:

$$
\begin{array}{lcl}
\text{code}_U\ a\ \rho & = & \text{uatom a} \\
\text{code}_U\ X\ \rho & = & \text{uvar}\ (\rho\, X) \\
\text{code}_U\ _\ \rho & = & \text{pop} \\
\text{code}_U\ \bar{X}\ \rho & = & \text{uref}\ (\rho\, X) \\
 & \ldots & \qquad\qquad // \text{ to be continued} \quad \text{:-)}
\end{array}
$$

The instruction uatom a implements the unification with the atom a:

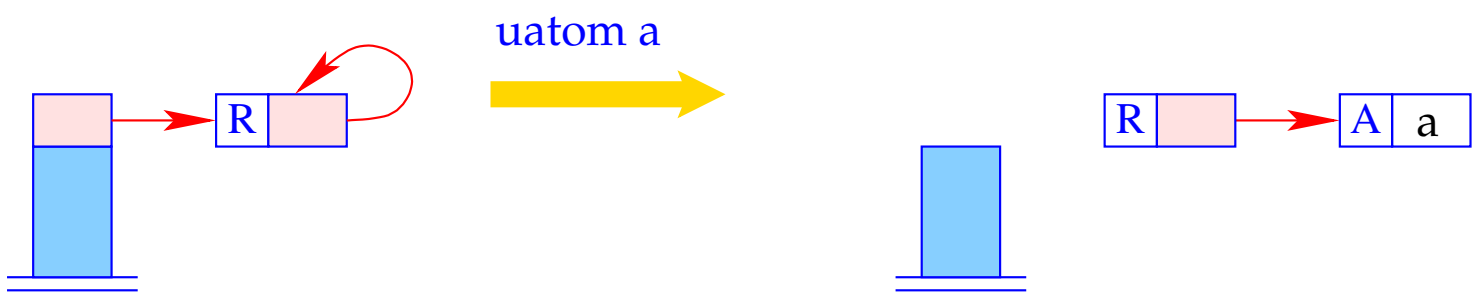


```
v = S[SP]; SP−−;
switch (H[v]) {
case (A, a):      break;
case (R,_) :      H[v] = (R, new (A, a));
                  trail (v); break;
default:          backtrack();
}
```

- The run-time function `trail()` records the a potential new binding.
- The run-time function `backtrack()` initiates backtracking.

The instruction uvar i implements the unification with an un-initialized variable:

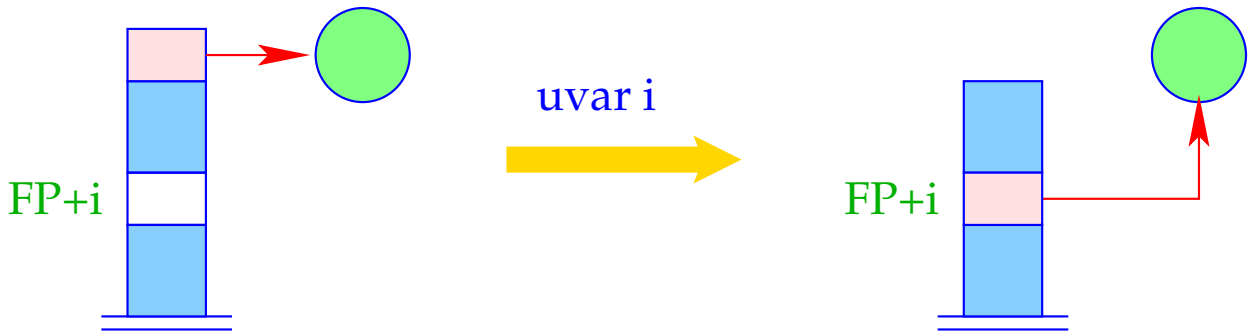

S[FP+i] = S[SP]; SP– –;

The instruction pop implements the unification with an anonymous variable. It always succeeds :-)

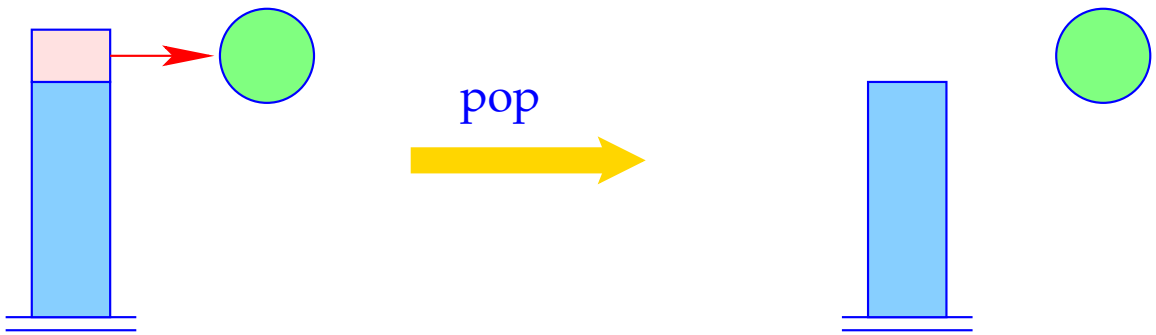

SP– –;

The instruction uref i implements the unification with an initialized variable:

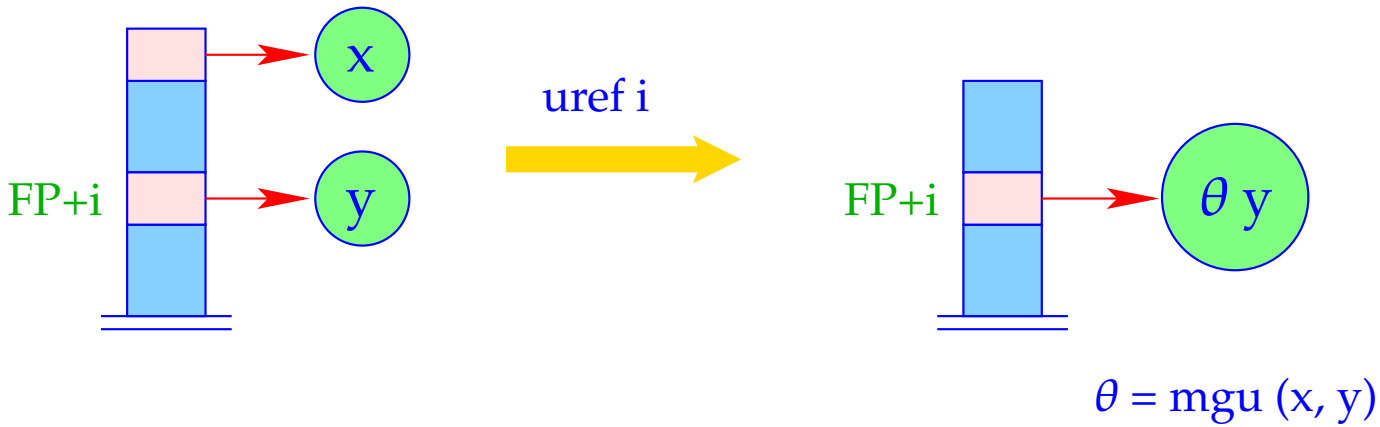


```
unify (S[SP], deref (S[FP+i]));
SP– –;
```

It is only here that the run-time function `unify()` is called :-)

- The unification code performs a pre-order traversal over t.
- In case, execution hits at an unbound variable, we switch from checking to building :-)

$$
\begin{array}{lll}
\text{code}_U\ f(t_1,\ldots,t_n)\ \rho \quad = & \text{ustruct f/n } A & \text{// test} \\
& \text{son 1} & \\
& \text{code}_U\ t_1\ \rho & \\
& \ldots & \\
& \text{son n} & \\
& \text{code}_U\ t_n\ \rho & \\
& \text{up B} & \\
A: & \text{check } \mathit{ivars}(f(t_1,\ldots,t_n))\ \rho & \text{// occur-check} \\
& \text{code}_A\ f(t_1,\ldots,t_n)\ \rho & \text{// building !!} \\
& \text{bind} & \text{// creation of bindings} \\
B: & \ldots &
\end{array}
$$

The Building Block:

Before constructing the new (sub-) term t' for the binding, we must exclude that it contains the variable X' on top of the stack !!!

This is the case iff the binding of no variable inside t' contains (a reference to) X'.

$\Longrightarrow$ $ivars(t')$ returns the set of already initialized variables of t.

$\Longrightarrow$ The macro check $\{Y_1, \ldots, Y_d\}\ \rho$ generates the necessary tests on the variables $Y_1, \ldots, Y_d$:

$$\begin{aligned} \text{check}\ \{Y_1, \ldots, Y_d\}\ \rho \quad = \quad & \text{check}\ (\rho\ Y_1) \\ & \text{check}\ (\rho\ Y_2) \\ & \ldots \\ & \text{check}\ (\rho\ Y_d) \end{aligned}$$

The instruction check i checks whether the (unbound) variable on top of the stack occurs inside the term bound to variable i.

If so, unification fails and backtracking is caused:

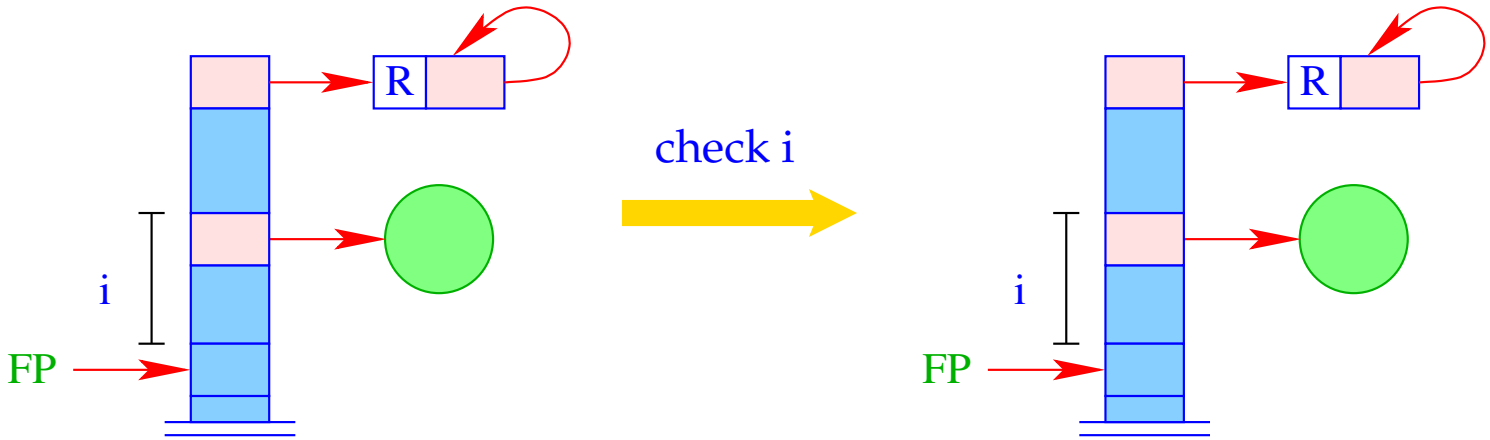


```
if (!check (S[SP], deref S[FP+i]))
    backtrack();
```

The instruction bind terminates the building block. It binds the (unbound) variable to the constructed term:

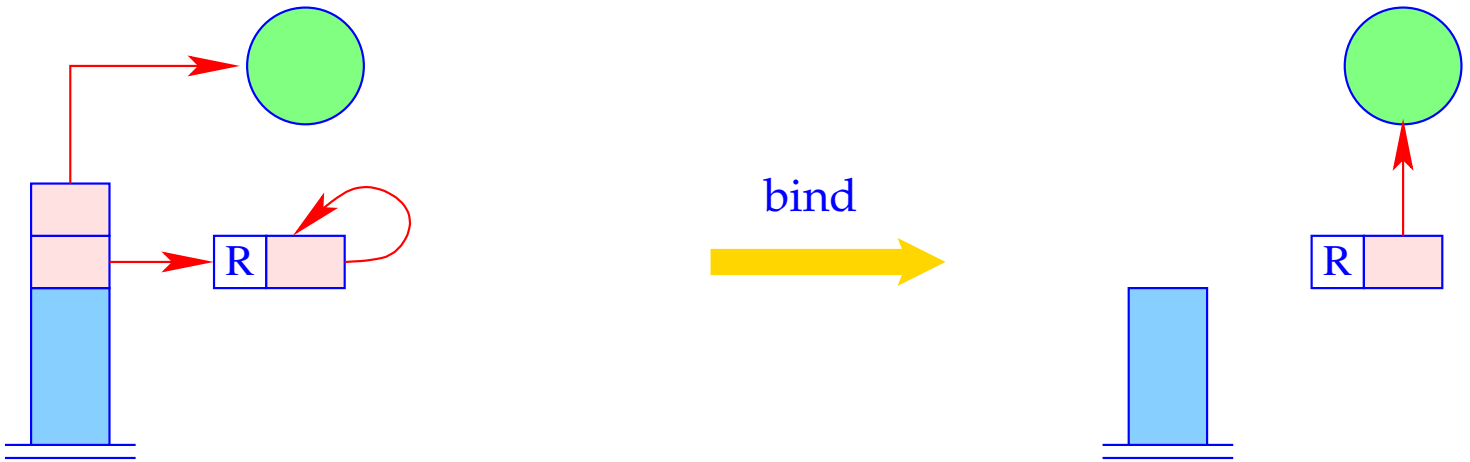


```
H[S[SP-1]] = (R, S[SP]);
trail (S[SP-1]);
SP = SP – 2;
```

The Pre-Order Traversal:

- First, we test whether the topmost reference is an unbound variable.
  If so, we jump to the building block.
- Then we compare the root node with the constructor f/n.
- Then we recursively descend to the children.
- Then we pop the stack and proceed behind the unification code:

Once again the unification code for constructed terms:

$$
\begin{array}{lll}
\text{code}_U\ f(t_1,\ldots,t_n)\ \rho \quad = & \text{ustruct f/n } A & \text{// test} \\
& \text{son 1} & \text{// recursive descent} \\
& \text{code}_U\ t_1\ \rho & \\
& \ldots & \\
& \text{son n} & \text{// recursive descent} \\
& \text{code}_U\ t_n\ \rho & \\
& \text{up B} & \text{// ascent to father} \\
A: & \text{check } \mathit{ivars}(f(t_1,\ldots,t_n))\ \rho & \\
& \text{code}_A\ f(t_1,\ldots,t_n)\ \rho & \\
& \text{bind} & \\
B: & \ldots &
\end{array}
$$

The instruction ustruct i implements the test of the root node of a structure:

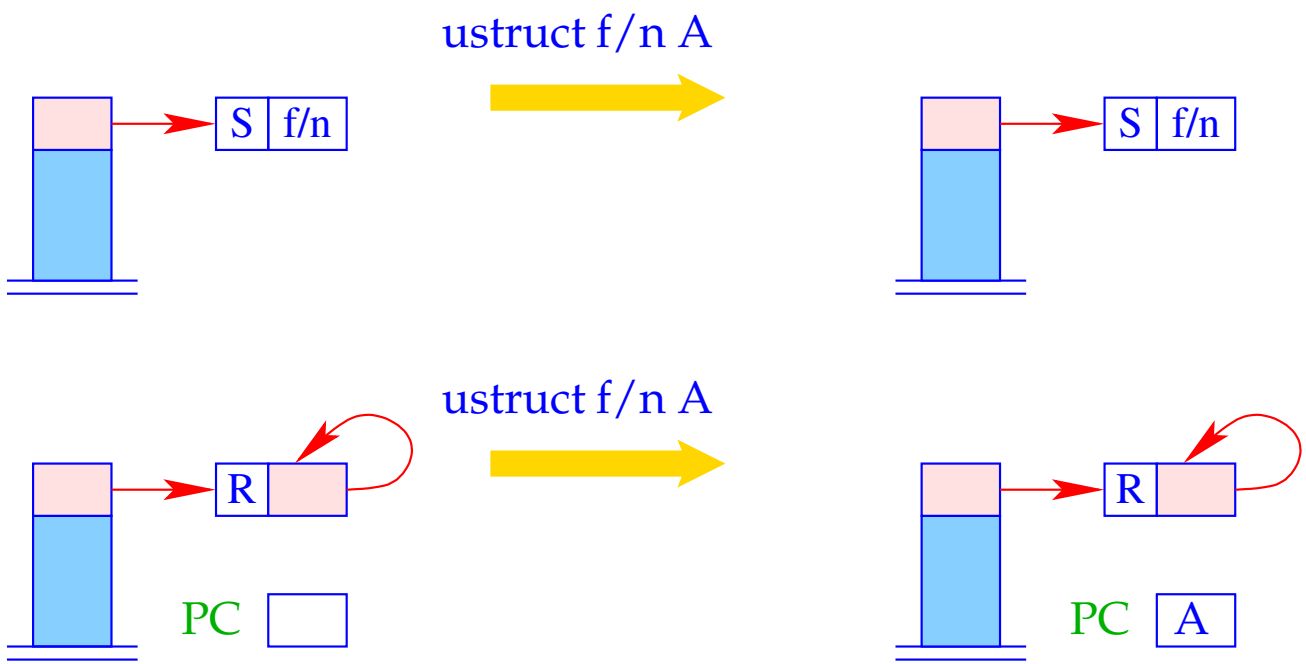


```
switch (H[S[SP]]) {
case (S, f/n):    break;
case (R,_) :      PC = A; break;
default:          backtrack();
}
```

... the argument reference is not yet popped :-)

The instruction son i pushes the (reference to the) i-th sub-term from the structure pointed at from the topmost reference:

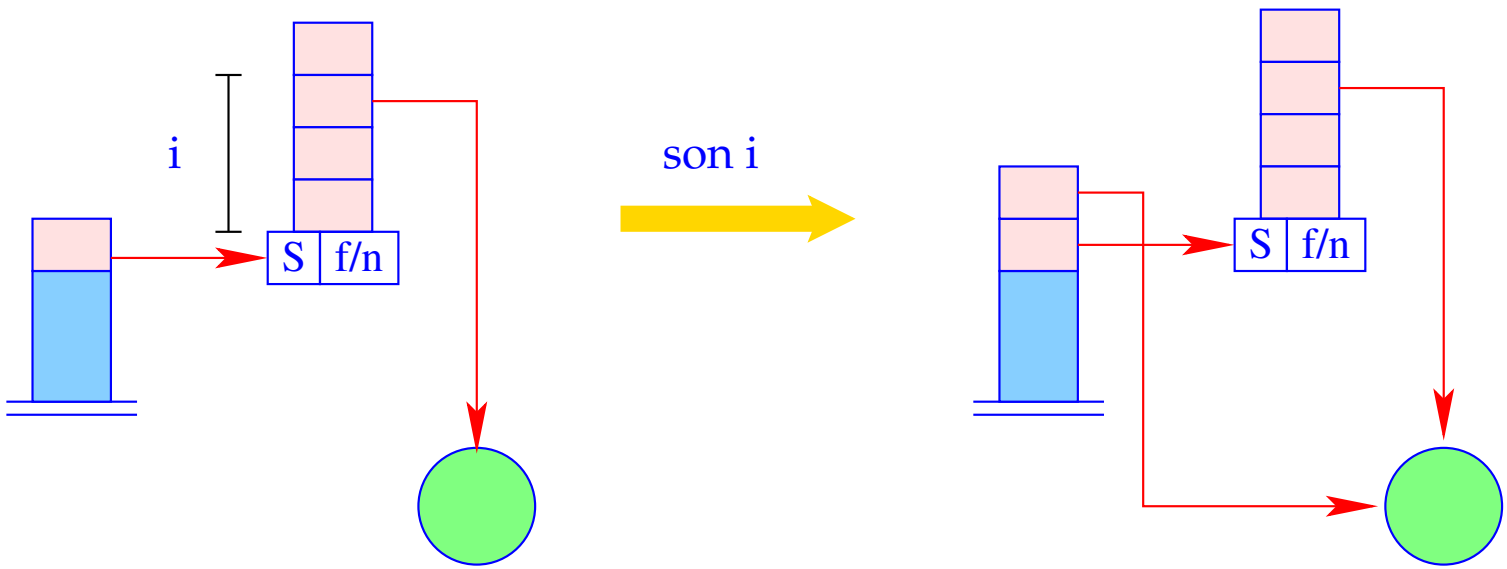

S[SP+1] = deref (H[S[SP]+i]); SP++;

It is the instruction up B which finally pops the reference to the structure:

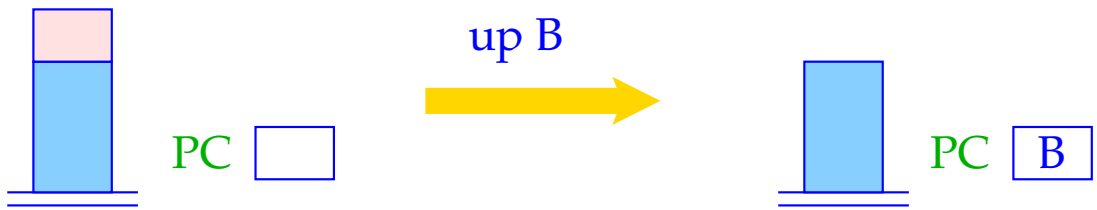

SP– –; PC = B;

The continuation address B is the next address after the build-section.

Example:

For our example term $f(g(\bar{X}, Y), a, Z)$ and $\rho = \{X \mapsto 1, Y \mapsto 2, Z \mapsto 3\}$ we obtain:

```
    ustruct f/3 A1          up B2          B2:  son 2          putvar 2
    son 1                                       uatom a         putstruct g/2
    ustruct g/2 A2     A2:  check 1             son 3           putatom a
    son 1                   putref 1            uvar 3          putvar 3
    uref 1                  putvar 2            up B1           putstruct f/3
    son 2                   putstruct g/2  A1:   check 1         bind
    uvar 2                  bind                putref 1   B1:  ...
```

Code size can grow quite considerably — for deep terms. In practice, though, deep terms are "rare" :-)

31 Clauses

Clausal code must

- allocate stack space for locals;
- evaluate the body;
- free the stack frame (whenever possible :-)

Let r denote the clause: $p(X_1, \ldots, X_k) \leftarrow g_1, \ldots, g_n.$

Let $\{X_1, \ldots, X_m\}$ denote the set of locals of r and ρ the address environment:

$$\rho\ X_i = i$$

Remark: The first k locals are always the formals :-)

Then we translate:

$$
\begin{array}{lcll}
\text{code}_C\ r & = & \text{pushenv m} & \text{// allocates space for locals} \\
 & & \text{code}_G\ g_1\ \rho & \\
 & & \ldots & \\
 & & \text{code}_G\ g_n\ \rho & \\
 & & \text{popenv} &
\end{array}
$$

The instruction popenv restores FP and PC and tries to pop the current stack frame.

It should succeed whenever program execution will never return to this stack frame :-)

The instruction pushenv m sets the stack pointer:

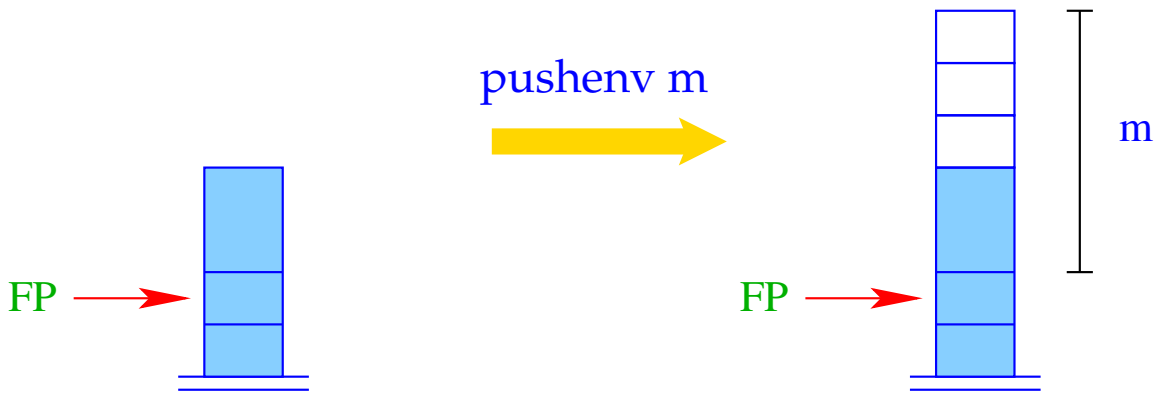

SP = FP + m;

Example:

Consider the clause r:

$$\mathsf{a}(X, Y) \leftarrow \mathsf{f}(\bar{X}, X_1), \mathsf{a}(\bar{X}_1, \bar{Y})$$

Then $\text{code}_C\ r$ yields:

```
pushenv 3      mark A      A:  mark B      B:  popenv
               putref 1        putref 3
               putvar 3        putref 2
               call f/2        call a/2
```

32 Predicates

A predicate q/k is defined through a sequence of clauses $rr \equiv r_1 \ldots r_f$.

The translation of q/k provides the translations of the individual clauses r_i.

In particular, we have for $f = 1$:

$$\text{code}_P\ rr \quad = \quad \text{code}_C\ r_1$$

If q/k is defined through several clauses, the first alternative must be tried.

On failure, the next alternative must be tried

$\Longrightarrow$ backtracking :-)

32.1 Backtracking

- Whenever unifcation fails, we call the run-time function `backtrack()`.
- The goal is to roll back the whole computation to the (dynamically :-) latest goal where another clause can be chosen $\Longrightarrow$ the last backtrack point.
- In order to undo intermediate variable bindings, we always have recorded new bindings with the run-time function `trail()`.
- The run-time function `trail()` stores variables in the data-structure trail:

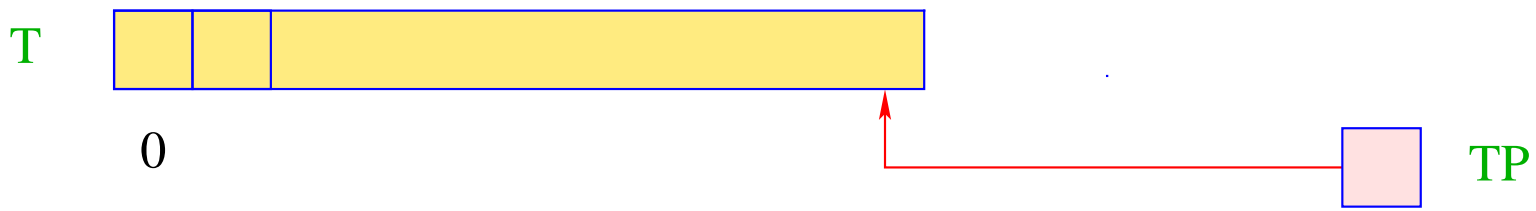

TP ═══ Trail Pointer

points to the topmost occupied Trail cell

The current stack frame where backtracking should return to is pointed at by the extra register BP:

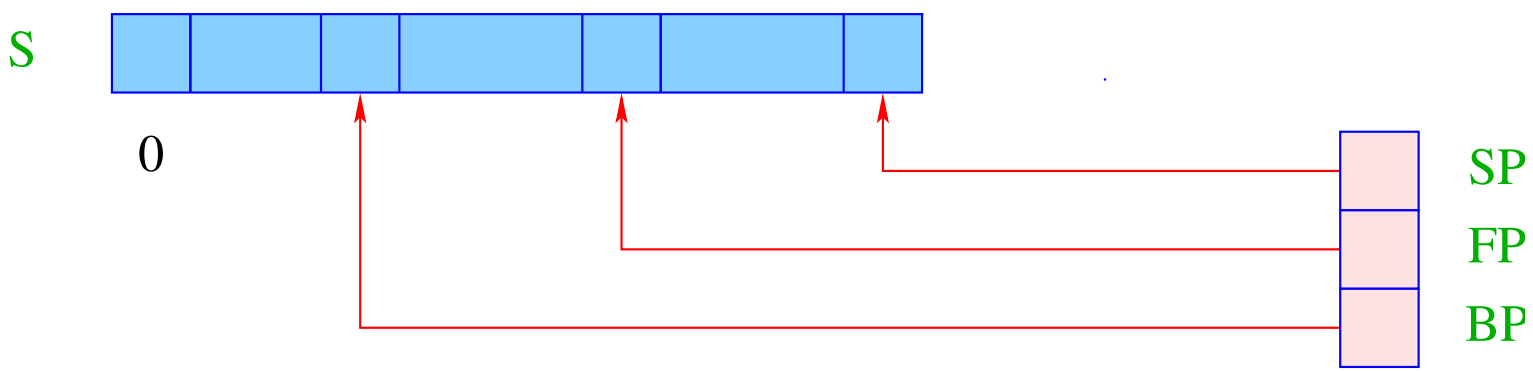

A backtrack point is stack frame to which program execution possibly returns.

- We need the code address for trying the next alternative (negative continuation address);
- We save the old values of the registers HP, TP and BP.
- Note: The new BP will receive the value of the current FP :-)

For this purpose, we use the corresponding four organizational cells:

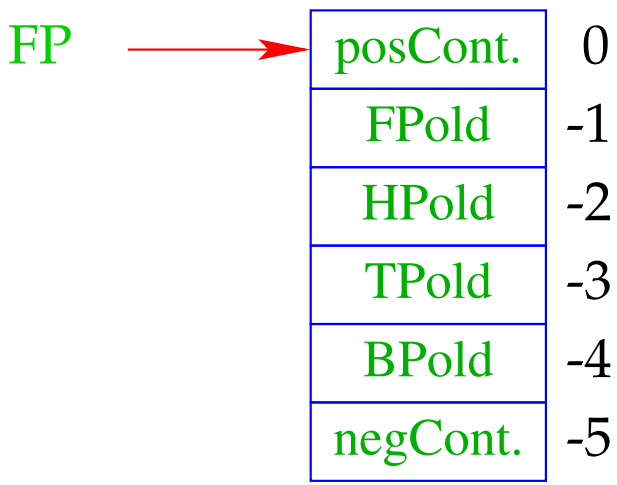

For more comprehensible notation, we thus introduce the macros:

$$\begin{aligned}
\text{posCont} &\equiv S[\text{FP}] \\
\text{FPold} &\equiv S[\text{FP}-1] \\
\text{HPold} &\equiv S[\text{FP}-2] \\
\text{TPold} &\equiv S[\text{FP}-3] \\
\text{BPold} &\equiv S[\text{FP}-4] \\
\text{negCont} &\equiv S[\text{FP}-5]
\end{aligned}$$

for the corresponding addresses.

Remark:

Occurrence on the left $\Longrightarrow$ saving the register

Occurrence on the right $\Longrightarrow$ restoring the register

Calling the run-time function `void backtrack()` yields:

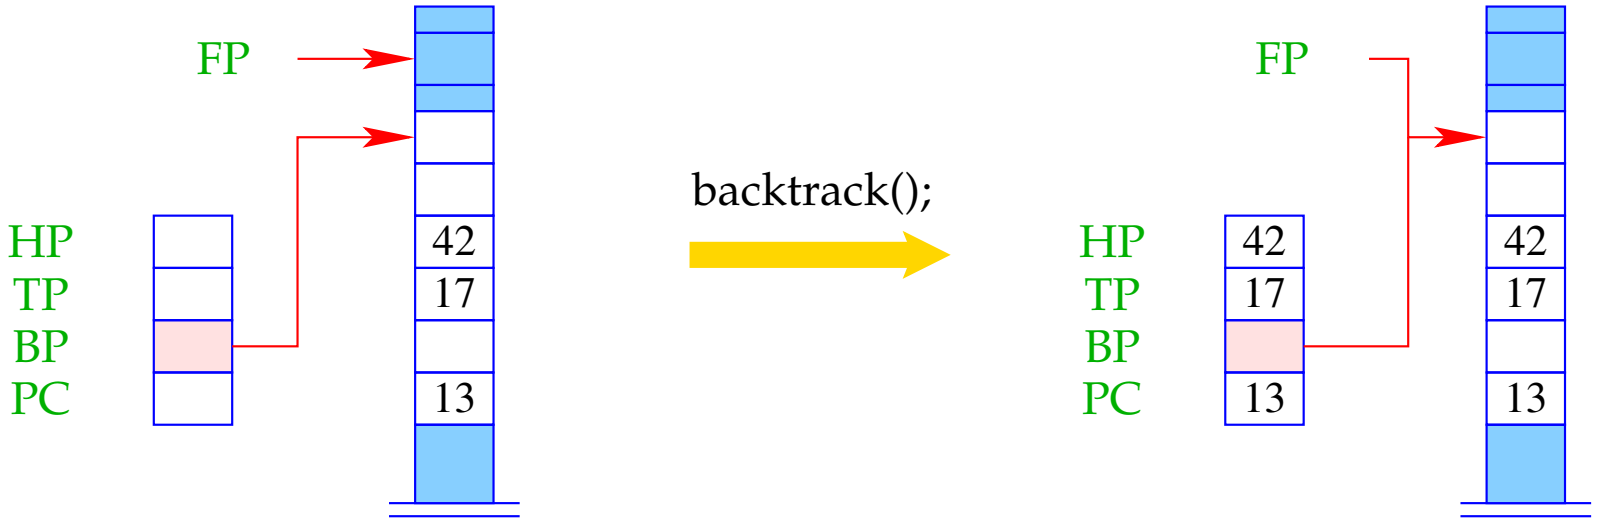


```
void backtrack() {
    FP = BP; HP = HPold;
    reset (TPold, TP);
    TP = TPold; PC = negCont;
}
```

where the run-time function `reset()` undoes the bindings of variables established since the backtrack point.

32.2 Resetting Variables

Idea:

- The variables which have been created since the last backtrack point can be removed together with their bindings by popping the heap !!! :-)
- This works fine if younger variables always point to older objects.
- Bindings of old variables to younger objects, though, must be reset manually :-(
- These are therefore recorded in the trail.

Functions `void trail(ref u)` and `void reset (ref y, ref x)` can thus be implemented as:

```
void trail (ref u) {
   if (u < S[BP-2]) {
      TP = TP+1;
      T[TP] = u;
   }
}
```

```
void reset (ref x, ref y) {
   for (ref u=y; x<u; u--)
      H[T[u]] = (R,T[u]);
}
```

Here, `S[BP-2]` represents the heap pointer when creating the last backtrack point.

32.3 Wrapping it Up

Assume that the predicate q/k is defined by the clauses $r_1, \ldots, r_f$ $(f > 1)$.
We provide code for:

- setting up the backtrack point;
- successively trying the alternatives;
- deleting the backtrack point.

This means:

$$
\begin{array}{lcll}
\text{code}_P\ rr & = & \text{q/k}: & \text{setbtp} \\
 & & & \text{try } A_1 \\
 & & & \ldots \\
 & & & \text{try } A_{f-1} \\
 & & & \text{delbtp} \\
 & & & \text{jump } A_f \\
 & & A_1: & \text{code}_C\ r_1 \\
 & & & \ldots \\
 & & A_f: & \text{code}_C\ r_f
\end{array}
$$

Note:

- We delete the backtrack point before the last alternative :-)
- We jump to the last alternative — never to return to the present frame :-))

Example:

$$\begin{aligned} \mathsf{s}(X) &\leftarrow \mathsf{t}(\bar{X}) \\ \mathsf{s}(X) &\leftarrow \bar{X} = a \end{aligned}$$

The translation of the predicate s yields:

```
s/1:  setbtp      A:  pushenv 1     B:  pushenv 1
      try A           mark C            putref 1
      delbtp          putref 1          uatom a
      jump B          call t/1          popenv
                  C:  popenv
```

The instruction setbtp saves the registers HP, TP, BP:

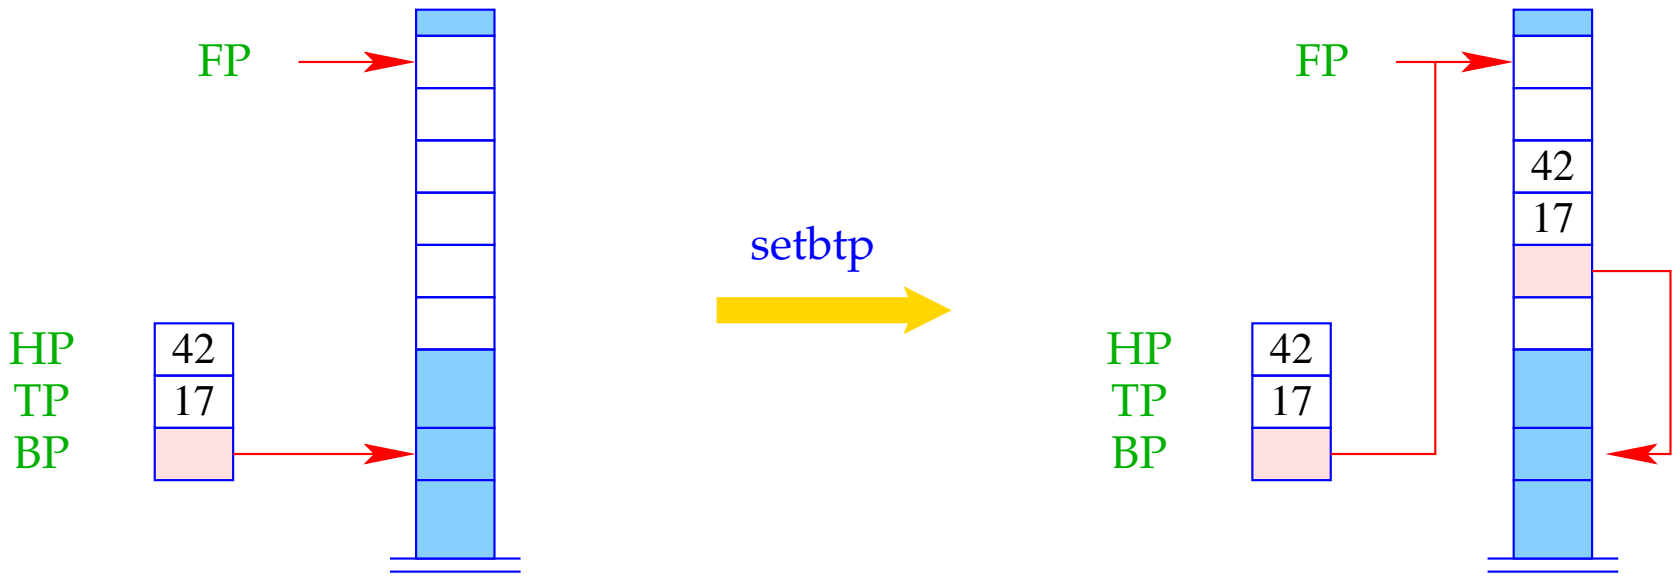


```
HPold = HP;
TPold = TP;
BPold = BP;
BP = FP;
```

The instruction try A tries the alternative at address A and updates the negative continuation address to the current PC:

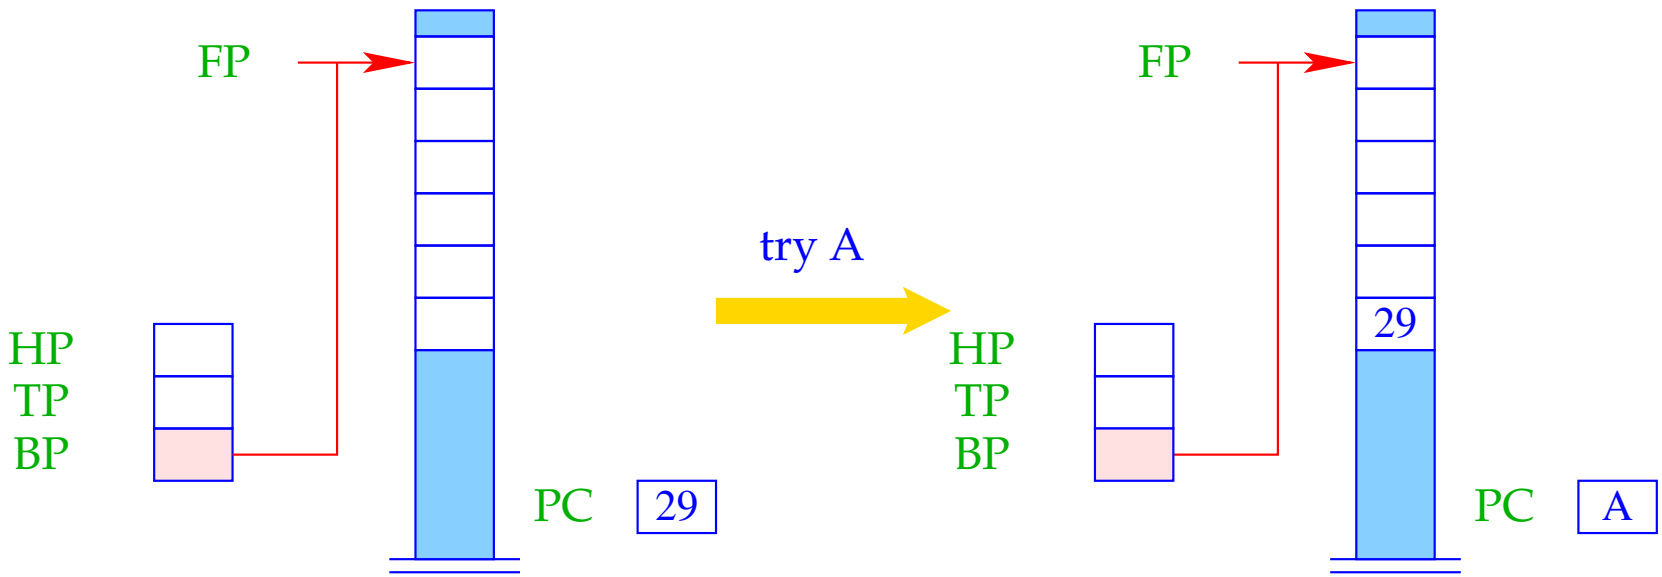

negCont = PC;
PC = A;

The instruction delbtp restores the old backtrack pointer:

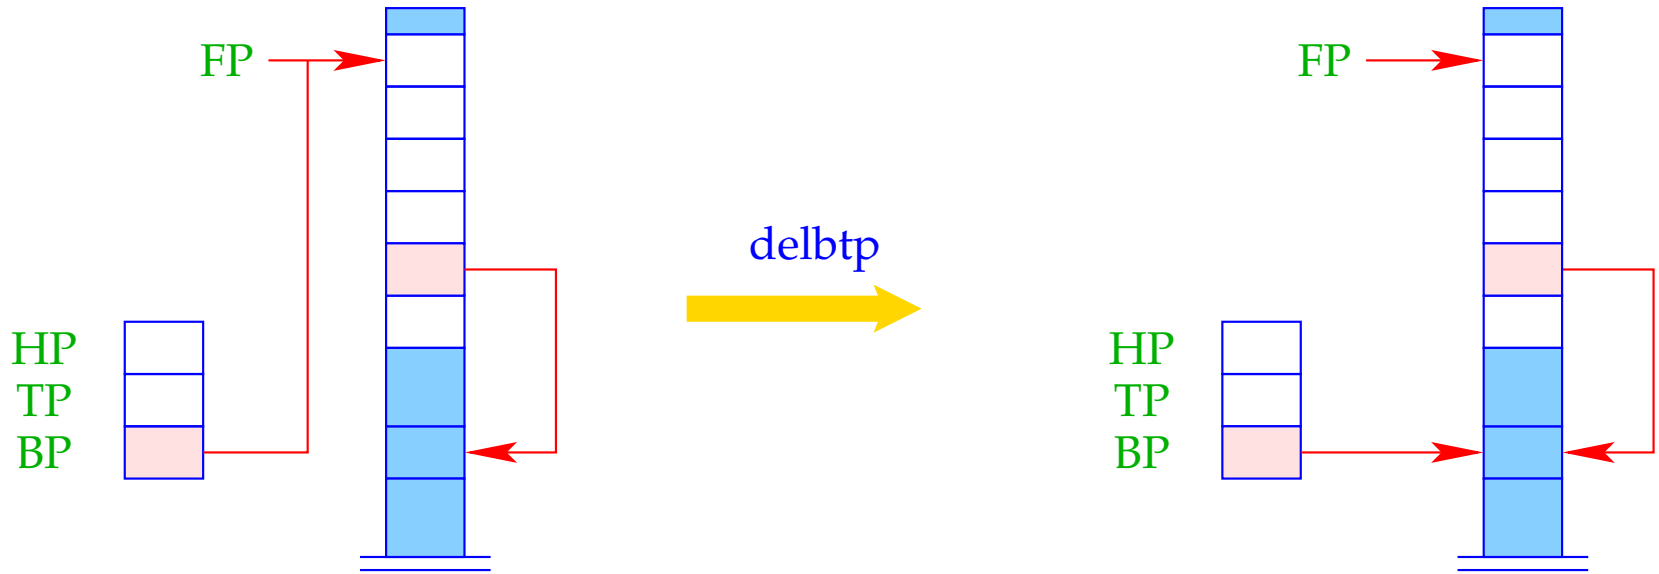

BP = BPold;